




Wheeler Model 32150 Pneumatic Test Pump SPECIFICATIONS

DIMENSIONS:	14" L x 19" W x 9"H
WEIGHT:	34 lbs., 11 kg
PUMP:	Reciprocating Plunger Inlet: 3/4" Hose, Garden Outlet: 1/2" NPT Capacity: 1gpm at free flow Pressure: 100 - 1500psi; 1gpm; 100psi @75cfm
32150	
CONTROL:	Adjustable pressure relief valve
GAUGE:	Glycerin filled, 0-4000psi
DISCHARGE HOSE:	1/4" x 10' (3m), 5500psi working pressure



FEATURES


- ✓ Automatic pressure regulator with inlet bypass
- ✓ Inline strainer with stainless steel mesh filter & clear bowl
- ✓ Built-in high pressure ball valve and fittings
- ✓ Rubber Padded Feet



Wheeler Model 32300 Pneumatic Test Pump SPECIFICATIONS

DIMENSIONS:	14" L x 19" W x 9"H
WEIGHT:	34 lbs., 11 kg
PUMP: 32300	Reciprocating Plunger Inlet: 3/4" Hose, Garden Outlet: 1/2" NPT Capacity: 1gpm at free flow Pressure: 100 - 3000psi; .5gpm; 100psi @75cfm
CONTROL:	Adjustable pressure relief valve
GAUGE:	Glycerin filled, 0-4000psi
DISCHARGE HOSE:	1/4" x 10' (3m), 5500psi working pressure

FEATURES

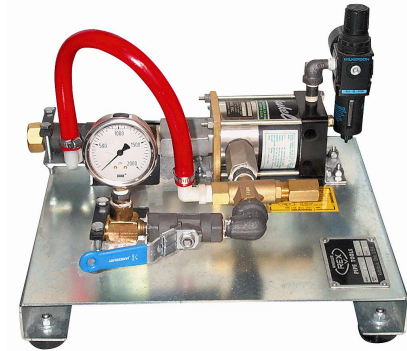

- ✓ Automatic pressure regulator with inlet bypass
- ✓ Inline strainer with stainless steel mesh filter & clear bowl
- ✓ Built-in high pressure ball valve and fittings
- ✓ Rubber Padded Feet